

Breaking a novel image encryption scheme based on improved hyperchaotic sequences

Chengqing Li*, Yuansheng Liu, Tao Xie

College of Information Engineering, Xiangtan University, Xiangtan 411105, Hunan, China

Abstract

Recently, a novel image encryption scheme based on improved hyperchaotic sequences was proposed. A pseudo-random number sequence, generated by a hyper-chaos system, is used to determine two involved encryption functions, bitwise exclusive or (XOR) operation and modulo addition. It was reported that the scheme can be broken with some pairs of chosen plain-images and the corresponding cipher-images. This paper re-evaluates security of the encryption scheme and finds that the encryption scheme can be broken with only one known plain-image. The performance of the known-plaintext attack, in terms of success probability and computation load, become even much better when two known plain-images are available. In addition, security defects on insensitivity of encryption result with respect to changes of secret key and plain-image, are reported also.

Keywords: chaos, image encryption, cryptanalysis, known-plaintext attack

1. Introduction

The popularization of image capture devices and fast improvement of transmission speed over all kinds of networks makes security of image become more and more important. However, the traditional text encryption techniques can not protect image efficiently due to the big difference between image and text. The subtle similarities between chaos and cryptography attracts researchers consider chaos as a novel way to design secure and efficient encryption schemes [1, 2, 3]. Meanwhile, some cryptanalysis work demonstrated that some chaos-based encryption schemes are insecure against various conventional attacks of different extents from the viewpoint of modern cryptology [4, 5, 6, 7, 8, 9, 10]. Some general approaches evaluating security of chaos-based encryption schemes were summarized in [11].

In [12], a novel image encryption scheme based on improved hyperchaotic sequences was proposed, where

a pseudo-random number sequence (PRNS), generated by a four-dimensional hyper-chaos system, is used to control modulation addition and bitwise exclusive or operation. Shortly after publication of [12], Fatih *et al.* found that equivalent secret key of the encryption scheme can be obtained by brute-force when some chosen plain-images and the corresponding cipher-images are available [13]. The present paper re-evaluates security of the encryption scheme proposed in [12], and finds the following security problems: (1) the scope of equivalent secret key of the encryption scheme can be narrowed efficiently by comparing one known plain-image and the corresponding cipher-image; (2) the equivalent secret key can be easily confirmed when two known plain-images and the corresponding cipher-images are available; (3) encryption results are not sensitive with respect to changes of plain-images/secret key.

The rest of this paper is organized as follows. The next section introduces the image encryption scheme under study briefly. Section 3 review the cryptanalysis work proposed by Fatih *et al.* and then present an ef-

*Corresponding author.

Email address: DrChengqingLi@gmail.com (Chengqing Li)

ficient known-plaintext attack on the image encryption scheme under study in detail with some experimental results. The last section concludes the paper.

2. The image encryption scheme under study

The plaintext of the image encryption scheme under study is a gray scale image. Without loss of generality, the plain-image can be represented as a one-dimensional 8-bit integer sequence $\mathbf{P} = \{p(i)\}_{i=1}^L$ by scanning it in the raster order, where L is number of pixels of the plain-image, and L is assumed to be a multiple of 4. Correspondingly, the cipher-image is denoted by $\mathbf{C} = \{c(i)\}_{i=1}^L$. Then, the proposed image encryption scheme can be described as follows¹:

- *The secret key*: initial state $(x(0), y(0), z(0), w(0))$ of the hyperchaotic system proposed in [14],

$$\begin{cases} \dot{x} = a(y - x) + yz, \\ \dot{y} = cx - y - xz + w, \\ \dot{z} = xy - bz, \\ \dot{w} = dw - xz, \end{cases} \quad (1)$$

where $(a, b, c, d) = (35, 8/3, 55, 1.3)$.

- *The initialization procedure*:

(1) In double-precision floating-point arithmetic, solve Eq. (1) with the fourth order Runge-Kutta method of fixed step length, $h = 0.001$, N_0 times from the initial condition $(x(0), y(0), z(0), w(0))$ iteratively, where $N_0 > 500$.

(2) Iterate the above quantization process $L/4$ more times and obtain four-dimensional state sequences $\{(x(i), y(i), z(i), w(i))\}_{i=1}^{L/4}$.

(3) Generate PRNS $K = \{k(i)\}_{i=1}^L$ as follows: for $l = 1, 2, \dots, L/4$, set $k(4l-3) = F(x(l))$, $k(4l-2) = F(y(l))$, $k(4l-1) = F(z(l))$, and $k(4l) = F(w(l))$, where

$$F(x) = \left(\lfloor |G(x)| - \lfloor G(x) \rfloor \rfloor \times 10^{14} \right) \bmod 256,$$

$G(x) = x \times 10^2 - \lfloor x \times 10^2 \rfloor$, and $|x|$, $\lfloor x \rfloor$ and $\lfloor x \rfloor$ rounds the absolute value of x , the nearest integers of x and the nearest integers less than or equal to x , respectively. Note that

$$F(x) = (\lfloor x \times 10^2 - \lfloor x \times 10^2 \rfloor \rfloor \times 10^{14}) \bmod 256$$

since $\lfloor \lfloor G(x) \rfloor \rfloor \equiv 0$.

- *The encryption procedure* includes the following two rounds of confusion steps.

(1) *Confusion I*: for $i = 2 \sim L$, do

$$t(i) = p(i) \oplus k(i-1) \oplus (t(i-1) \dot{+} k(i)), \quad (2)$$

where

$$t(1) = p(1) \oplus k(1) \oplus (c(0) \dot{+} k(1)), \quad (3)$$

$c(0)$ is a predefined integer falling in interval $[1, 255]$.

(2) *Confusion II*: for $i = 2 \sim L$, do

$$c(i) = t(i) \oplus k(i-1) \oplus (c(i-1) \dot{+} k(i)), \quad (4)$$

where

$$c(1) = t(1) \oplus k(1) \oplus (t(L) \dot{+} k(1)). \quad (5)$$

- *The decryption procedure* is similar to the encryption procedure except the following points: (1) *Confusion II* is performed first; (2) the operation on each elements in the both two diffusion steps is carried out in a reverse order; (3) the variables $t(i)$ and $p(i)$ in Eq. (2) and the variables $c(i)$ and $t(i)$ in Eq. (4) are swapped, respectively.

3. Cryptanalysis

3.1. Fatih et al.'s attack

To make presentation of this paper more complete, Fatih et al.'s attack proposed in [13] is reviewed and commented in this subsection.

Substituting Eq. (3) and Eq. (2) into Eq. (5) and Eq. (4), respectively, one has

$$\begin{aligned} c(1) &= p(1) \oplus k(1) \oplus (c(0) \dot{+} k(1)) \oplus k(1) \oplus (t(L) \dot{+} k(1)) \\ &= p(1) \oplus (c(0) \dot{+} k(1)) \oplus (t(L) \dot{+} k(1)). \end{aligned} \quad (6)$$

¹To make the presentation of the whole paper more concise and complete, some notations in the original paper [12] are modified under condition that the encryption scheme is not changed.

and

$$\begin{aligned} c(i) &= p(i) \oplus k(i-1) \oplus (t(i-1) \dot{+} k(i)) \oplus k(i-1) \\ &\quad \oplus (c(i-1) \dot{+} k(i)) \\ &= p(i) \oplus (t(i-1) \dot{+} k(i)) \oplus (c(i-1) \dot{+} k(i)) \end{aligned} \quad (7)$$

for $i = 2 \sim L$. The idea of Fatih *et al.*'s attack is to search $(t(L), k(1))$ and $(t(i-1), k(i))$ and verify them with Eq. (6) and Eq. (7), respectively, where $i = 2 \sim L$. In [13], Fatih *et al.* choose a plain-image of fixed value zero, namely $p(i) \equiv 0$. Success of Fatih *et al.*'s attack depends on whether the known values of α and y can verify combination β and x in

$$y = (\alpha \dot{+} x) \oplus (\beta \dot{+} x), \quad (8)$$

where α, β, x, y are all 8-bit integers, and $(\alpha \dot{+} x) = (\alpha + x) \bmod 2^8$. Referring to [15], one can see that it is very difficult to estimate the required number of known/chosen plain-images assuring success of Fatih *et al.*'s attack. In addition, computational complexity of Fatih *et al.*'s attack is $O(L \cdot 256 \cdot 256 \cdot 4 \cdot 4) = O(2^{20}L)$, which means the attack complexity is a little high when L is very large.

3.2. Attack with one known plain-image

In [12, Sec. 3.4], it was claimed that the image encryption scheme under study is robust against known/chosen-plaintext attack. However, we found the encryption scheme can be broken with even only one known plain-image.

Proposition 1. Assume one pair of known plain-image, $\mathbf{P} = \{p(i)\}_{i=1}^L$, and the corresponding cipher-image, $\mathbf{C} = \{c(i)\}_{i=1}^L$, are available, the unknown sequences $\{t(i)\}_{i=1}^L$ and $\{k(i)\}_{i=1}^{L-2}$ are only determined by the values of $k(L-1)$ and $k(L)$.

Proof: Given the values of $k(L-1)$ and $k(L)$, one can get

$$t(L) = c(L) \oplus k(L-1) \oplus (c(L-1) \dot{+} k(L)) \quad (9)$$

from Eq. (4). Referring to Eq. (2), one further has

$$t(L-1) = (t(L) \oplus p(L) \oplus k(L-1)) \dot{-} k(L), \quad (10)$$

where $a \dot{-} b = (a - b + 256) \bmod 256$. Then, one can obtain

$$k(L-2) = c(L-1) \oplus t(L-1) \oplus (c(L-2) \dot{+} k(L-1)) \quad (11)$$

from Eq. (4). Similarly, one can obtain

$$\begin{cases} t(i) = (t(i+1) \oplus p(i+1) \oplus k(i)) \dot{-} k(i+1) \\ k(i-1) = c(i) \oplus t(i) \oplus (c(i-1) \dot{+} k(i)) \end{cases} \quad (12)$$

for $i = L-2 \sim 2$, and

$$t(1) = (t(2) \oplus p(2) \oplus k(1)) \dot{-} k(2).$$

So, the proposition is proved. ■

From Proposition 1, one can see that the equivalent secret key of the image encryption scheme under study, $\{t(i)\}_{i=1}^L$ and $\{k(i)\}_{i=1}^L$, are only determined by the values of $k(L-1)$ and $k(L)$ when one pair of known-plaintext and the corresponding cipher-text are available. As $t(L)$ is determined by $k(L-1)$ and $k(L)$ via Eq. (9), and $t(1)$ and $k(1)$ are generated by them in the above iteration form, two independent equations of form of Eq. (8), Eq. (3), and Eq. (5), are available for verification of the search in this attack method. Success of this attack depends on whether wrong version of $(k(L-1), k(L))$ can generate the corresponding version of $(t(1), t(L), k(L))$ passing verification of Eq. (3) and Eq. (5). Assume $t(1)$, $t(L)$ and $k(1)$ satisfy uniform distribution, one can get the probability of passing verification of Eq. (3) and Eq. (5) are both $\frac{1}{256}$. So, only a small number of $k(L-1)$ and $k(L)$ can pass the verification. As shown in Sec. 3.4, $\{k(i)\}_{i=1}^L$ and $\{k(i) \oplus 128\}_{i=1}^L$ are equivalent for encryption/decryption of the image encryption scheme under study, they are considered as one in this section. Note that $\{c(i)\}_{i=1}^L$, $\{k(i)\}_{i=1}^L$ and L all have influence on the verification, the success rate is very hard to be estimated. To illustrate this problem, the image "Peppers" of size 512×512 , shown in Fig. 2a), is chosen as the known plain-image, the number of possible versions of $\{k(i)\}_{i=1}^L$ passing the verification under one hundred random secret keys are shown in Fig. 1. As for 5% of the one hundred random secret keys, the equivalent secret key can be confirmed definitely. As for more than 70% of them, the scope size of equivalent secret key is less than 6.

When $(x(0), y(0), z(0), w(0)) = (5, 10, 5, 10)$, $N_0 = 1000$ and $c(0) = 3$ (the key used in [12, Sec. 3]), one of the possible versions of $\{k(i)\}_{i=1}^L$ passing the verification is used to decrypt the cipher-image shown in Fig. 2, and the result is shown in Fig. 2d). It is counted that 60.13% of the pixels of the image shown in Fig. 2d) are correct, which shows that even the wrong version may be used to recover some information of the cipher-image. So, we can conclude that this attack is very effective. From Proposition 2, one can see that the most significant bit of $k(L)$ need not be searched. So, the computation complexity of this attack can be estimated as $O(256 \cdot 128 \cdot L \cdot 2 \cdot 3) = O(2^{17}L)$.

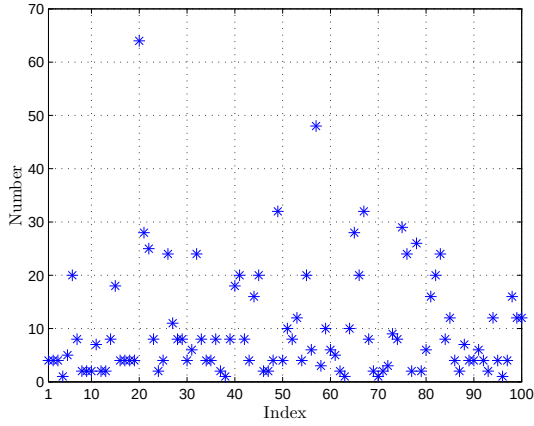


Figure 1: The number of possible versions of $\{k(i)\}_{i=1}^L$ passing the verification under every set of random secret key.

3.3. Attack with two known plain-images

When two known plain-images, $\mathbf{P}_1 = \{p_1(i)\}_{i=1}^L$ and $\mathbf{P}_2 = \{p_2(i)\}_{i=1}^L$, and the corresponding cipher-image, $\mathbf{C}_1 = \{c_1(i)\}_{i=1}^L$, $\mathbf{C}_2 = \{c_2(i)\}_{i=1}^L$, are available, coincidence of two versions of $\{k(i)\}_{i=L-2}^1$ can be used as $L - 2$ independent conditions to verify the search of $(k(L - 1), k(L))$ in the above sub-section. So, the success probability of obtaining the equivalent secret key can be improved greatly and the attack complexity can be reduced much at the same time.

The detailed approach of the attack can be described as follows.

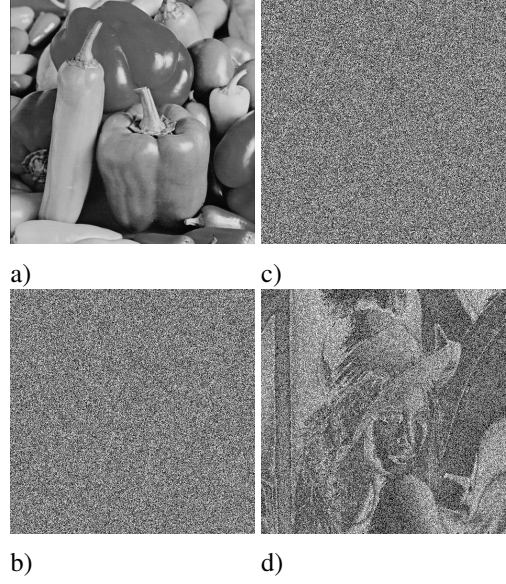


Figure 2: The known-plaintext attack I: a) known plain-image "Peppers"; b) the cipher-image of "Peppers"; c) the cipher-image of a plain-image "Lenna"; d) decryption result of Fig. 2c).

- *Step 1)* Set $i = L - 1$ and $(k(L - 1), k(L))$ with a possible set of values and get

$$t_1(L) = c_1(L) \oplus k(L - 1) \oplus (c_1(L - 1) \dot{+} k(L))$$

and

$$t_2(L) = c_2(L) \oplus k(L - 1) \oplus (c_2(L - 1) \dot{+} k(L)).$$

- *Step 2)* Set $i = i - 1$. If $i > 1$ and

$$\begin{aligned} c_1(i) \oplus t_1(i) \oplus (c_1(i - 1) \dot{+} k(i)) &= c_2(i) \oplus t_2(i) \\ &\oplus (c_2(i - 1) \dot{+} k(i)), \end{aligned} \quad (13)$$

repeat *Step 2)*; otherwise go to *Step 1)*, where

$$\begin{cases} t_1(i) = (t_1(i + 1) \oplus p_1(i + 1) \oplus k(i)) \dot{-} k(i + 1), \\ t_2(i) = (t_2(i + 1) \oplus p_2(i + 1) \oplus k(i)) \dot{-} k(i + 1). \end{cases} \quad (14)$$

- *Step 3)* If $i = 1$,

$$c_1(1) = t_1(1) \oplus k_1(1) \oplus (t_1(L) \dot{+} k_1(1)) \quad (15)$$

or

$$c_2(1) = t_2(1) \oplus k_2(1) \oplus (t_2(L) \dot{+} k_2(1)), \quad (16)$$

output the value of $(k(L - 1), k(L))$; otherwise go to *Step 1)*.

Now, let's analyze performance of the above attack. Observe Eq. (13), one has

$$Prob(t) = \prod_{i=L-2}^t Prob(i),$$

where $Prob(i)$ denotes the probability condition (13) is satisfied, and $t \in \{L-2, L-3, \dots, 1\}$. Obviously, Eq. (13) can be considered a function of the form of Eq. (8). Given variable α, β, x, y of uniform distribution, the probability Eq. (8) holds is $1/256$. Assume $\{t(i)\}_{i=1}^L$, $\{c(i)\}_{i=1}^L$ and $\{k(i)\}_{i=1}^L$ distribute uniformly, one can get $Prob(t) = (1/256)^{L-1-t}$. So, one can assure that $\{k(i)\}_{i=1}^{L-1}$, $\{t_1(i)\}_{i=1}^L$ and $\{t_2(i)\}_{i=1}^L$ can be determined in a very extremely high probability when the variable i in *Step 3*) can reach to $L-5$. Once $t_1(1), t_1(L), t_2(1), t_2(L), k(1)$ are determined, the remaining values of $k(L)$ can be further confirmed with condition (15) or condition (16). In addition, Eq. (5) can be used for verification also. Now, one can conclude that $\{k(i)\}_{i=1}^{L-1}$ can be determined in an extremely high probability when $L \geq 5$. The computational complexity of this attack is $O(256 \cdot 128 \cdot 5 \cdot (3 \cdot 2 + 7)) = O(2^{21})$, which is smaller than that of Fatih *et al.*'s attack very much.

To verify the above analysis, some experiments were made. Beside the pair of known plain-image and the corresponding cipher-image shown in Fig. 2, another plain-image "Babarra" and the encrypted version, shown in Figs. 3a), b), respectively, are used. Then, the obtained equivalent secret key is used to decrypt the cipher-image shown in Fig. 2c) and the recovery result is shown in Fig. 3c), which is identical with the original version.

3.4. Two other security defects

In this subsection, two other security defects of the image encryption scheme under study are discussed.

- *Low sensitivity with respect to changes of secret key*

In [12, Sec. 3.3.1], it was concluded that the image encryption scheme under study is sensitive to changes of secret key from experiment results on

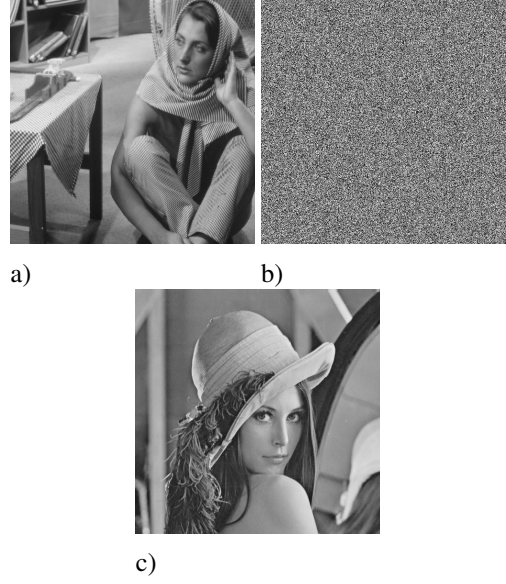


Figure 3: The known-plaintext attack II: a) the second known plain-image "Babarra"; b) the cipher-image of plain-image "Babarra"; c) decryption result of Fig. 2c).

some selected secret keys. However, this conclusion is groundless. From Proposition 2, one has

$$\begin{cases} c(1) = p(1) \oplus (t(L) \dot{+} k(1)) \oplus (c(0) \dot{+} k(1)) \\ = p(1) \oplus (t(L) \dot{+} (k(1) \oplus 128)) \oplus (c(0) \dot{+} (k(1) \oplus 128)) \end{cases}$$

and

$$\begin{cases} c(i) = p(i) \oplus (t(i-1) \dot{+} k(i)) \oplus (c(i-1) \dot{+} k(i)), \\ = p(i) \oplus (t(i-1) \dot{+} (k(i) \oplus 128)) \oplus (c(i-1) \dot{+} (k(i) \oplus 128)), \end{cases}$$

for $i = 2 \sim L$, which means that $K' = \{k'(i)\}_{i=1}^L$ is equivalent to $K = \{k(i)\}_{i=1}^L$ with respect to encryption/decryption procedure, where $k'(i) \in \{k(i), k(i) \oplus 128\}$. So, there are at least 2^L equivalent secret keys for each secret key of the image encryption scheme under study. This serious defect also exists in some other image encryption schemes [16].

- *Low sensitivity with respect to change of plain-image*

As well known in the field of cryptology, sensitivity of encryption results with respect to changes

of plaintext is an important property measuring a secure encryption scheme. This property is especially important for secure image encryption schemes due to the following reasons: (1) strong redundancy exist among neighboring pixels of an uncompressed plain-image; (2) a plain-image and its watermarked versions, which generally modify the original image slightly, are often encrypted at the same time. In [12, Sec. 3.3.2], it is claimed that the proposed encryption scheme is very sensitive with respect to changes of plain-image. However, the claim is questionable due to the following points: (1) there is no any nonlinear operation, like S-box, is involved in the whole encryption scheme; (2) there is no any operation generating carry bit toward lower level in the whole scheme, so a bit of plain-image can only influence the bits in higher bit planes of the corresponding cipher-image.

Proposition 2. Assume α and β are n -bit non-negative integers, then

$$(\alpha \oplus 2^{n-1}) \dot{+} \beta = (\alpha \dot{+} \beta) \oplus 2^{n-1}.$$

Proof: First, $\alpha \oplus 2^{n-1} = \alpha \dot{+} 2^{n-1}$ can be proofed under the following two cases: (1) when $\alpha \geq 2^{n-1}$, one has $\alpha \oplus 2^{n-1} = \alpha - 2^{n-1} = \alpha \dot{+} 2^{n-1}$; (2) when $\alpha < 2^{n-1}$, one has $\alpha \oplus 2^{n-1} = \alpha + 2^{n-1} = \alpha \dot{+} 2^{n-1}$. So, $(\alpha \oplus 2^{n-1}) \dot{+} \beta = (\alpha \dot{+} \beta) \dot{+} 2^{n-1} = (\alpha \dot{+} \beta) \oplus 2^{n-1}$. ■

4. Conclusion

This paper re-studied security of a novel image encryption scheme in detail. It is found that the encryption scheme can be effectively broken with only two known plain-images. Both mathematical proofs and experimental results are presented to support the proposed attack. In addition, some other security defects of the encryption scheme are shown also.

Acknowledgement

This research was supported by the National Natural Science Foundation of China (Nos. 61100216, 61211130121).

References

- [1] G. Chen, Y. Mao, C. K. Chui, A symmetric image encryption scheme based on 3d chaotic cat maps, *Chaos, Solitons & Fractals* 21 (3) (2004) 749–761.
- [2] G. Ye, Image scrambling encryption algorithm of pixel bit based on chaos map, *Pattern Recognition Letters* 31 (5) (2010) 347–354.
- [3] J. Chen, J. Zhou, K.-W. Wong, A modified chaos-based joint compression and encryption scheme, *IEEE Transactions on Circuits and Systems II* 58 (2) (2011) 110–114.
- [4] S. Li, G. Chen, X. Mou, On the security of the Yi-Tan-Siew chaotic cipher, *IEEE Transactions on Circuits and Systems-II: Express Briefs* 51 (12) (2004) 665–669.
- [5] D. Xiao, X. Liao, K.-W. Wong, Improving the security of a dynamic look-up table based chaotic cryptosystem, *IEEE Transactions on Circuits and Systems II: Express Briefs* 53 (6) (2006) 502–506.
- [6] S. Li, C. Li, G. Chen, K.-T. Lo, Cryptanalysis of the RCES/RSES image encryption scheme, *Journal of Systems and Software* 81 (7) (2008) 1130–1143.
- [7] C. Li, S. Li, M. Asim, J. Nunez, G. Alvarez, G. Chen, On the security defects of an image encryption scheme, *Image and Vision Computing* 27 (9) (2009) 1371–1381.
- [8] E. Solak, C. Cokal, O. T. Yildiz, T. Biyikoglu, Cryptanalysis of Fridrich's chaotic image encryption, *International Journal of Bifurcation and Chaos* 20 (5) (2010) 1405–1413.
- [9] E. Solak, R. Rhouma, S. Belghith, Cryptanalysis of a multi-chaotic systems based image cryptosystem, *Optics Communications* 283 (2) (2010) 232–236.
- [10] X. Wang, G. He, Cryptanalysis on a novel image encryption method based on total shuffling scheme, *Optics Communications* 284 (24) (2011) 5804–5807.
- [11] G. Álvarez, S. Li, Some basic cryptographic requirements for chaos-based cryptosystems, *International Journal of Bifurcation and Chaos* 16 (8) (2006) 2129–2151.
- [12] C. Zhu, A novel image encryption scheme based on improved hyperchaotic sequences, *Optics Communications* 285 (1) (2012) 29–37.
- [13] F. Ozkaynak, A. B. Ozer, S. Yavuz, Cryptanalysis of a novel image encryption scheme based on improved hyperchaotic sequences, *Optics Communications* 285 (24) (2012) 4946–4948.
- [14] Y. Niu, Xingyuan, M. Wang, H. Zhang, A new hyperchaotic system and its circuit implementation, *Communications in Nonlinear Science and Numerical Simulation* 15 (11) (2010) 3518–3524.
- [15] C. Li, Y. Liu, L. Y. Zhang, M. Z. Q. Chen, Breaking a chaotic image encryption algorithm based on modulo addition and xor operation, *arxiv:1207.6536* (2012).
- [16] C. Li, G. Chen, On the security of a class of image encryption schemes, in: *Proceeding of IEEE International Symposium on Circuits and Systems*, 2008, pp. 3290–3293.